


500 Economy Flange 2x4



APPLICATIONS

Offices, Class Rooms,
Retail Stores, Hospitals

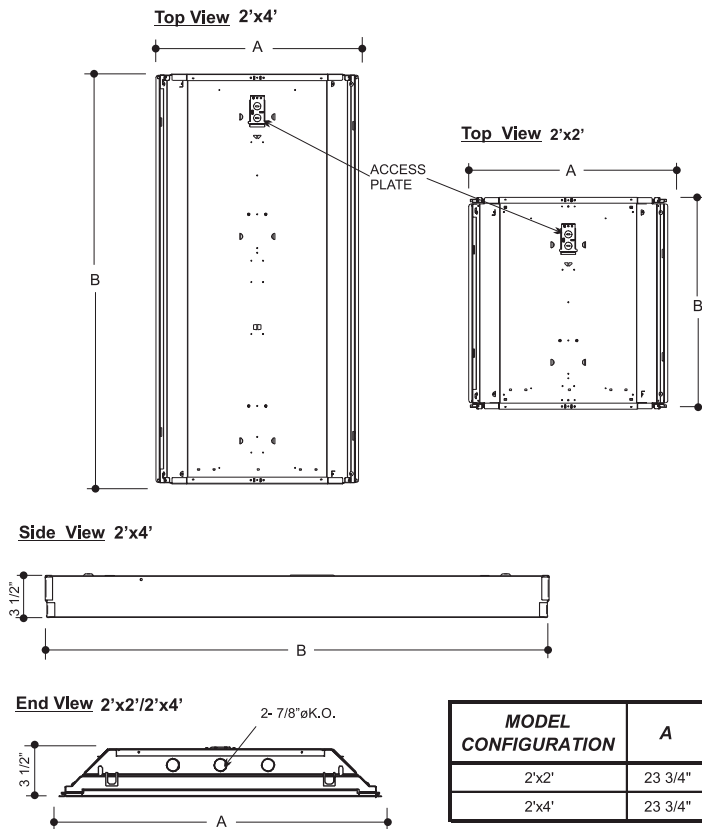

MODEL CONFIGURATION	A	B
2'x2'	23 3/4"	23 3/4"
2'x4'	23 3/4"	47 3/4"

500 - EF - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options
Economy Flange		2	17-17wT8	2x2	120v	EM - Emergency Ballast
		3	32-32wT8	2x4	277v	R - Silver Reflector
		4	14-14wT5		UNV	HO - High Output*
			28-28wT5			Dim - Dimmable Ballast
			24-24wT5-HO			9C - 9CC11 Louver
			54-54wT5-HO			18C - 18CC11 Louver
						.125 - Prismatic Plastic**
						Lexan - Unbreakable Plastic

Economy Flange

* Only available in T5
** .125 inches thick

(Product Number eg.: 400-PV-214-T-277-R)

CONSTRUCTION

Die-formed and embossed, 20 gauge pre-painted white cold rolled steel housing assembly. Embossed housing for strength and rigidity. Wiring access plate or knockouts are provided on back of housing. Knockouts are provided on ends for through wiring. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is held within a hinged frame door. The heavy gauge door frame hinges downward, on either side, and is held in the closed position by two positive cam latches. The metal-to-metal design of the door eliminates most light leaks.

MOUNTING

Recessed fixture for sheetrock type ceilings. Flange kit is provided.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency and low glare illumination. Optional shielding is available. Optional VF-1 reflectors are made of specular low iridescence, anodized aluminum with a reflectivity of 94% or better.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface. Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.