




**660 Low Profile**

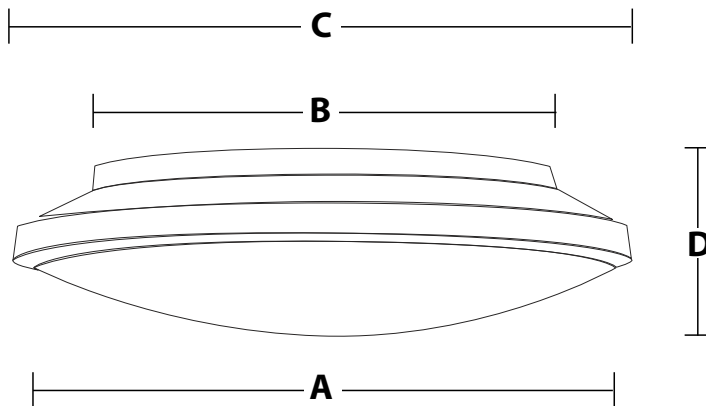

Size	A	B	C	D	Options
13	11 7/8	9 7/8	12 15/16	3	1 or 2 PL-13/22w circline
17	15 3/8	13	16	3 5/8	2 or 3 PL-13/22 - 32w Circline
21	19 5/8	17	20 15/16	4	32 - 40w Circline

**CONSTRUCTION**

The fixture component set consists of a housing which is stamped and spun, creating a floating effect on the mounting surface. This effect is further reinforced with the utilization of a shallow dome diffuser. The diffuser mounts to the fixture housing with the use of three spring clips. Three choices for the housing consist of white, polished brass, and brushed nickel. There are three diameters of size to choose from with a variety of lamping options in each size.

**MOUNTING**

Fixtures are designed for surface mounting.

**FINISH**

Phosphate coated, highly reflective, baked, white enamel.

**PLASTIC**

The shallow dome diffusers are available in either white, clear prismatic, or Dani-Lite prismatic colored diffusers. The diffusers are constructed of 50% acrylic and 50% DR acrylic to allow of the easy mounting an accessibility of the diffuser to the housing

**ELECTRICAL**

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved. Knockouts are provided on the back and ends for all types of wiring. Slide-on or snap-in sockets are provided. Ballast and sockets are replaceable without removing the fixture from the mounting surface. Standard ballasts are electronic 120v.

**OPTIONS**

Check product key or consult factory for available options.

660	-	LP	-		-		-		-		=	Product Number
Series	Description	# of Lamps	Wattage/Size	Voltage	Options							
	Low Profile		22-22w Circline 32-32w Circline 54-22/32w Circline 72-32/40w Circline	120v	WA-white acrylic PA-prismatic acrylic DL-Prismatic Dani-Lite							
13		1	PL13-13w compact									
17		2	PL26-26w compact									
21		3										
<b>Low Profile</b>												
(Product Number eg.: 400-PV-214-T-277-R)												