








760 Vandal Proof

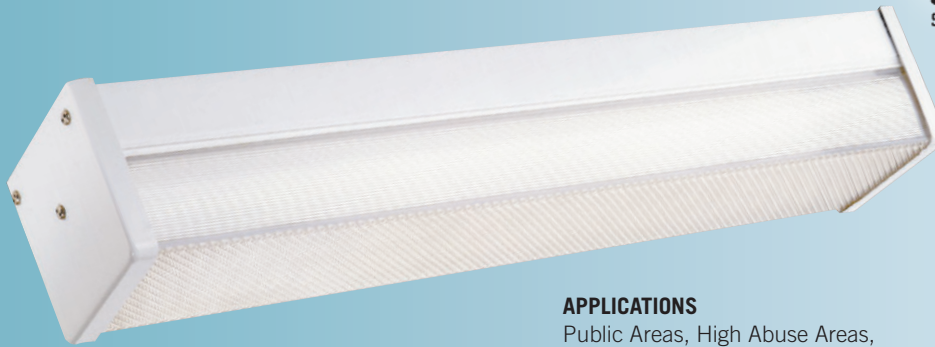

APPLICATIONS

Public Areas, High Abuse Areas,
Locker Rooms, Stairwells,
Corridors, Bathrooms

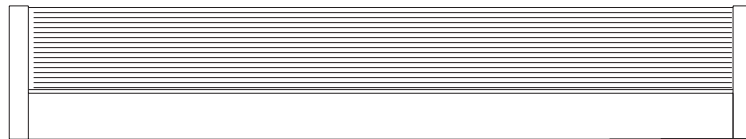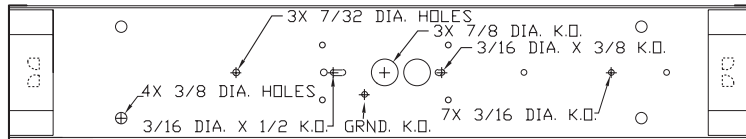

T8	
SIZE	LENGTH
(1 or 2) 17W	24-1/4
(1 or 2) 25W	36-1/4
(1 or 2) 32W	48-1/4

T12	
SIZE	LENGTH
(1 or 2) 20W	24-1/4
(1 or 2) 30W	36-1/4
(1 or 2) 40W	48-1/4

REV 3-1-05

760 - VP - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options
Vandal Proof	Vandal Proof	1	20-40wT12		120v	EM - Emergency Ballast
		2	30-30wT12		277v	Dim - Dimmable Ballast
			40-40wT12		UNV	MS - Motion Sensor
			17-17wT8			
			25-25wT8			
			32-32wT8			

(Product Number eg.: 400-PV-214-T-277-R)

CONSTRUCTION

Die-formed and spot welded, 16-gauge cold-rolled steel housing. Plastic is held in place on both ends by end caps with provisions for three, tamper proof stainless steel screws.

MOUNTING

Wall or ceiling mounted. Mounts over electrical junction box. Mounting holes are provided.

FINISH

Phosphate coated, highly reflective, baked white enamel.

PLASTIC

Clear prismatic lens. One piece molded polycarbonate lens with nominal .125" wall thickness and continual groove designed to fit snugly over housing's edge. Tamper and impact resistant - standard.

.125 100% DR clear prismatic lens

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.