


525 Economy Layin 2x4



APPLICATIONS

Offices, Class Rooms,
Retail Stores, Hospitals

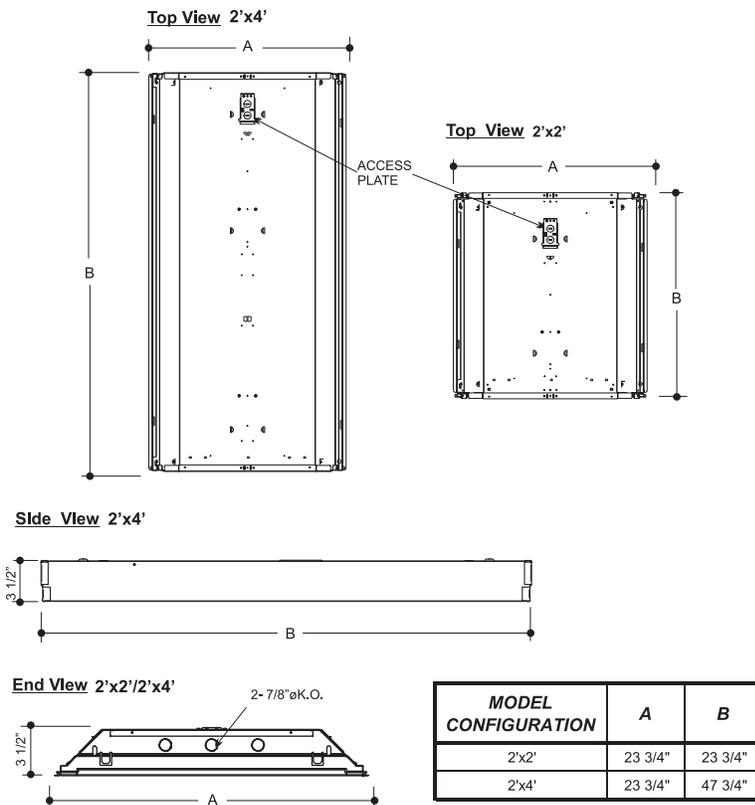

MODEL CONFIGURATION	A	B
2'x2'	23 3/4"	23 3/4"
2'x4'	23 3/4"	47 3/4"

CONSTRUCTION

Die-formed and embossed, 20 gauge pre-painted white cold rolled steel housing assembly. Embossed housing for strength and rigidity. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. (4' Units only.) Knockouts are provided on ends for through wiring. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is held within a hinged frame door. The heavy gauge door frame hinges downward, on either side, and is held in the closed position by two positive cam latches. The metal-to-metal design of the door eliminates most light leaks.

MOUNTING

Lay-in type fixture for exposed grid type acoustical ceiling structure. Holes provided for chain mounting support to building structure.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency and low glare illumination. Optional shielding is available.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.

525	EL					= Product Number
Series	Description	# of Lamps	Wattage	Size	Voltage	Options
Economy Layin		2	17-17w T8	2x2	120v	EM - Emergency Ballast
		3	32-32w T8	2x4	UNV	R - Silver Reflector
		4	14-14w T5			HO - High Output*
			28-28w T5			Dim - Dimmable Ballast
			24-24w T5-HO			9C - 9 Cel Louver
			54-54w T5-HO			18C - 18 Cel Louver
						.125 -Prismatic Plastic**
						Lexan - Unbreakable Plastic
Economy Layin				(Product Number eg.: 400-PV-214-T-277-R)		
* Only available in T5 ** .125 inches thick						