




# 760 Vandal Proof




### APPLICATIONS


Public Areas, High Abuse Areas, Locker Rooms, Stairwells, Corridors, Bathrooms




END



LENS

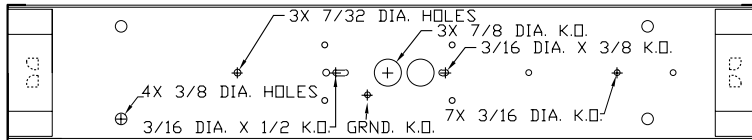

TOP

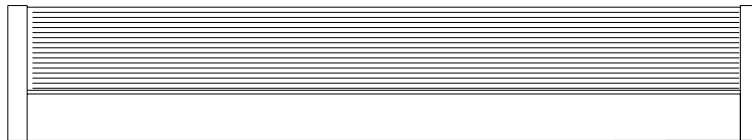

SIDE W/LENS

T8	
SIZE	LENGTH
(1 or 2) 17W	24-1/4
(1 or 2) 25W	36-1/4
(1 or 2) 32W	48-1/4

T12	
SIZE	LENGTH
(1 or 2) 20W	24-1/4
(1 or 2) 30W	36-1/4
(1 or 2) 40W	48-1/4

REV 3-1-05

### CONSTRUCTION

Die-formed and spot welded, 16-gauge cold-rolled steel housing. Plastic is held in place on both ends by end caps with provisions for three, tamper proof stainless steel screws.

### MOUNTING

Wall or ceiling mounted. Mounts over electrical junction box. Mounting holes are provided.

### FINISH

Phosphate coated, highly reflective, baked white enamel.

### PLASTIC

Clear prismatic lens. One piece molded polycarbonate lens with nominal .125" wall thickness and continual groove designed to fit snugly over housing's edge. Tamper and impact resistant - standard.

.125 100% DR clear prismatic lens

### ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

### OPTIONS

Check product key or consult factory for available options.

760	-	VP	-	-	-	-	-	=	Product Number
Series	Discription	# of Lamps	Wattage	Size	Voltage	Options			
	Vandal	1	20-20w	T12	120v	EM - Emergency Ballast			
	Proof	2	30-30w	T12	UNV	Dim - Dimmable Ballast			
			40-40w	T12		MS - Motion Sensor			
			17-17w	T8					
			25-25w	T8					
			32-32w	T8					
<b>Vandal Proof</b>			(Product Number eg.: 400-PV-214-T-277-R)						