


370 Wrap LED Bulbs



APPLICATIONS

Offices, Class Rooms,
Retail Stores, Hospitals

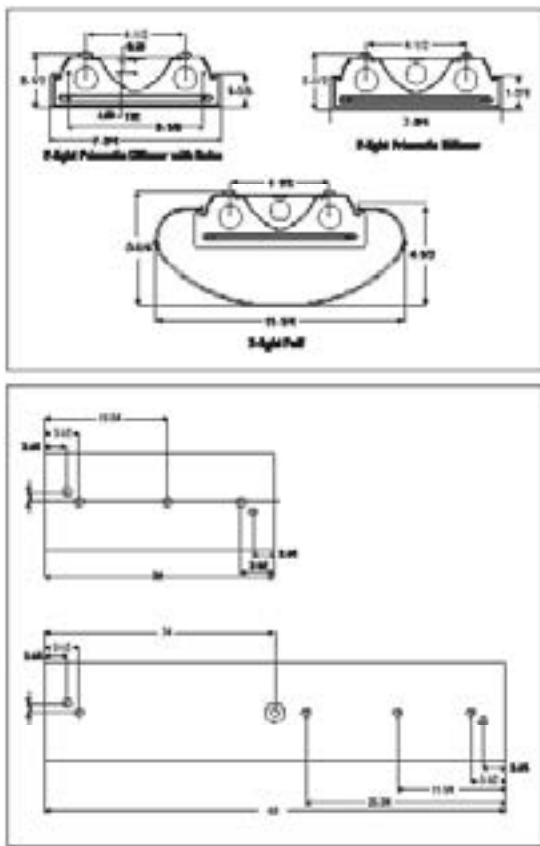

CONSTRUCTION

Die formed and embossed, 20 gauge pre-painted white cold rolled steel housing assembly. Embossed housing for strength and rigidity. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. (4' Units only.) Knockouts are provided on ends for through wiring. Diffuser hinges from either side in a lift and shift manner and is self centering. End caps may be butted together for continuous row mounting.

MOUNTING

Mounts over electrical junction box. Offset mounting pads keep the bulb level and slightly off of mounting surface.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Wraparound, extruded clear acrylic diffuser with prismatic bottom and ribbed linear sides, designed for high efficiency and visual comfort.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and NYC approved.

OPTIONS

Check product key or consult factory for available options.

370	-	WR	-		-	-	=	Product Number
Series	Description	# of Lamps	Wattage	Size	Voltage	Options		
	Wraparound	240-LED*		4ft	UNV	EM - Emergency Ballast MS- Motion Sensor		
*Fixtures are designed for Direct Power LED tubes. No ballast necessary.								
Wraparound				(Product Number eg.: 400-PV-214-T-277-R)				
* Only available in T5 ** .125 inches thick								