



213 Wall Wraparound

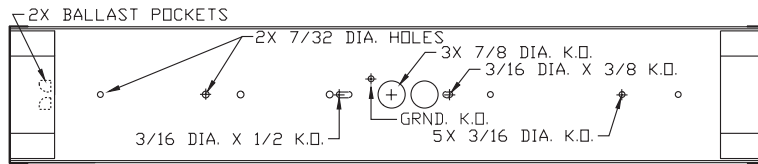


APPLICATIONS

Corridors, Stairwells, Bathrooms

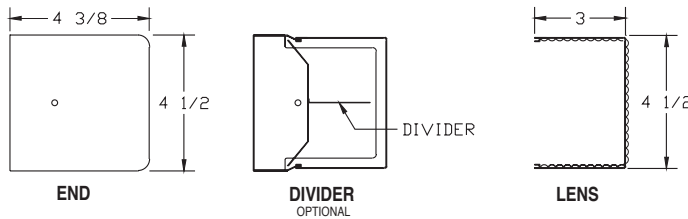

TOP

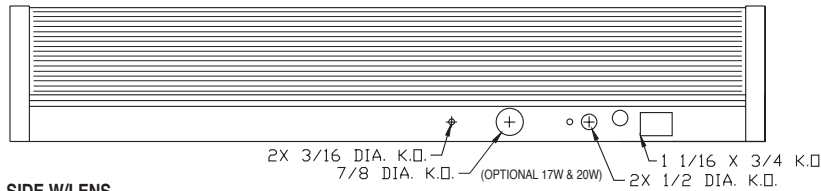

SIDE W/LENS

T5	
SIZE	LENGTH
(1, 2 OR 3) 6W	9-1/4
(1, 2 OR 3) 8W	12-1/4
(1, 2 OR 3) 28W	46-1/4

T8	
SIZE	LENGTH
(1 OR 2) 15W	18-1/4
(1 OR 2) 17W	24-1/4
(1 OR 2) 25W	36-1/4
(1 OR 2) 32W	48-1/4

T12	
SIZE	LENGTH
(1 OR 2) 14W	15-1/4
(1 OR 2) 15W	18-1/4
(1 OR 2) 20W	24-1/4
(1 OR 2) 30W	36-1/4
(1 OR 2) 40W	48-1/4

REV 3-1-05

213 - WR - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options	
WR	aparound	1	15-15w	T12	T-8'	120v	CO - Conv. Outlet
		2	20-20w	T12	Master/Slave	277v	SW - Switch
			30-30w	T12		UNV	WH - Smooth white plastic
			40-40w	T12			EM - Emergency Ballast
			17-17w	T8			Dim - Dimmable Ballast
			25-25w	T8			MS - Motion Sensor
			32-32w	T8			MH- Mouse Hole Ends

Wraparound

(Product Number eg.: 400-PV-214-T-277-R)

CONSTRUCTION

Die-formed and spot welded 20 guage cold rolled steel housing.

Plastic is held in place on both ends by end caps with a single acorn type nut.

Spot welded for maximum rigidity.

MOUNTING

Wall or ceiling mounted. Mounts over electrical junction box. Mounting holes are provided.

End caps can be removed for continuous row mounting with optional joiner band.

FINISH

Phosphate coated, highly reflective, baked, white enamel. Also available in white, walnut, chrome, oak or brass

PLASTIC

Acrylic, clear prismatic, standard diffuser or acrylic, smooth white diffuser.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.