


660 Low Profile LED

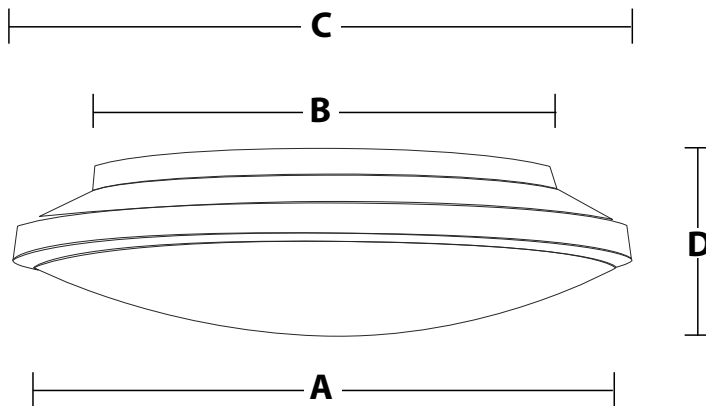

Size	A	B	C	D	Options
13	11 7/8	9 7/8	12 15/16	3	
17	15 3/8	13	16	3 5/8	
21	19 5/8	17	20 15/16	4	

CONSTRUCTION

The fixture component set consists of a housing which is stamped and spun, creating a floating effect on the mounting surface. This effect is further reinforced with the utilization of a shallow dome diffuser. The diffuser mounts to the fixture housing with the use of three spring clips. Three choices for the housing consist of white, polished brass, and brushed nickel. There are three diameters of size to choose from with a variety of lamping options in each size.

MOUNTING

Fixtures are designed for surface mounting.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

The shallow dome diffusers are available in either white, clear prismatic, or Dani-Lite prismatic colored diffusers. The diffusers are constructed of 50% acrylic and 50% DR acrylic to allow of the easy mounting an accessibility of the diffuser to the housing

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and NYC approved. Knockouts are provided on the back and ends for all types of wiring.

Keystone Future Fit AC LED Drivers.

Phase Control Dimming

Rated for 50,000 hours

OPTIONS

Check product key or consult factory for available options.

660	-	17	-		-		-		=	Product Number
Series	Discription	# of Lamps	Wattage	Voltage	Options					
	13		15W-LED	120v	WA - White Acrylic					
	17		25W-LED		PA - Prismatic Acrylic					
	21				DL - Prismatic Dani-Lite					
					BN - Brushed Nickel					
			15W - 1650 Lumens							
			25W - 2450 Lumens							
Low Profile										(Product Number eg.: 400-PV-214-T-277-R)