




800 Surface



APPLICATIONS

Offices, Stairwells, Corridors,
Class Rooms, Hospital,
Nursing Homes

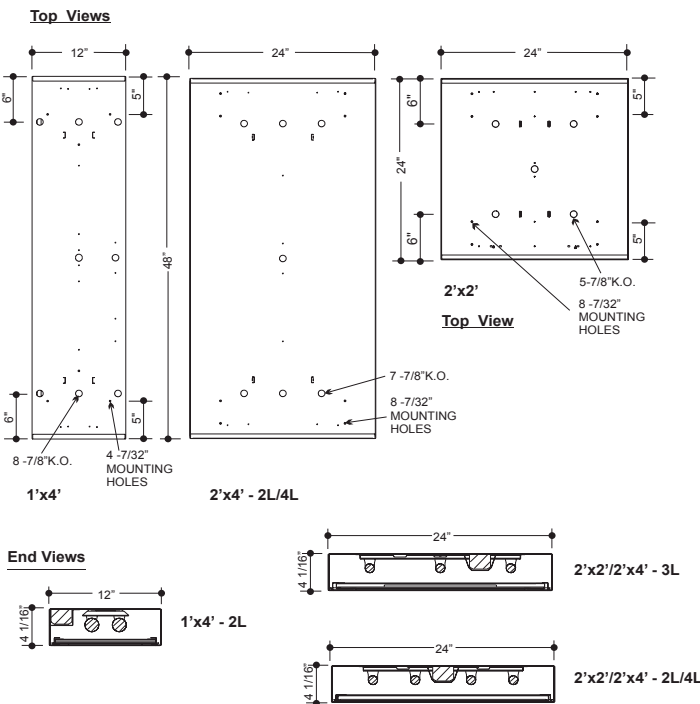

CONSTRUCTION

Die-formed and spot welded, 20 gauge cold rolled steel housing assembly. Spot welded for rigidity and clean appearance. Ballast cover snaps into place eliminating the need for tools when accessing the ballast. Diffuser is held within a hinged frame door. The heavy gauge door frame hinges downward, on either side, and is held in the closed position by two positive cam latches. The metal-to-metal design of the door eliminates most light leaks.

MOUNTING

Knock-outs are provided for stem mounting. Mounting holes are provided.

FINISH

Phosphate coated, highly reflective, baked white enamel.

PLASTIC

Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency and low glare illumination.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.

800 - SH - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options
	Surface	2	40-40w T12	1x4	120v	EM - Emergency Ballast
		4	32-32w T8	2x2	277v	HO - High Output*
		6	28-28w T5	2x4	UNV	Dim - Dimmable Ballast
			54-54w T5-HO			R - Silver Reflector
						9C - 9 Cel Louver
						18C - 18 Cel Louver
						.125 - Prismatic Plastic**
						Lexan - Unbreakable Plastic
						ST12 - 12" Stem Kit
						ST24 - 24" Stem Kit
						ST36 - 36" Stem Kit
						ST48 - 48" Stem Kit

Surface

(Product Number eg.: 400-PV-214-T-277-R)

* Only available in T5 ** .125 inches thick