




315 Under Cabinet





APPLICATIONS

Under Counter, Kitchens,
Task Areas, Offices, Display,
Bathroom

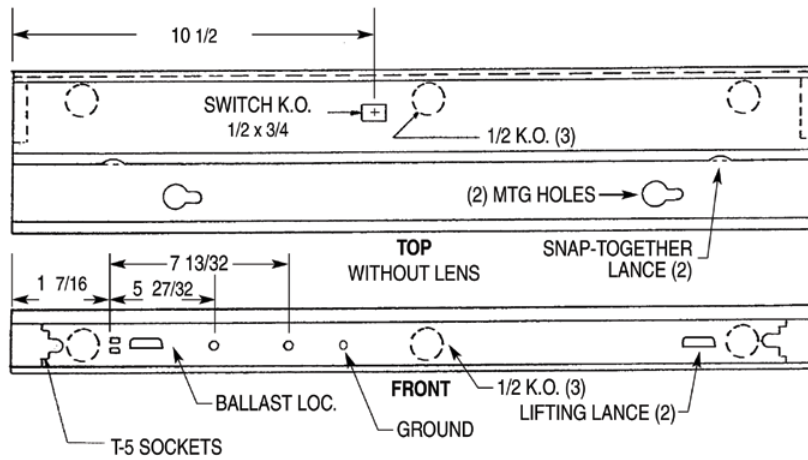

T-5	
SIZE	LENGTH
(1) 6W	9-9/32
(1) 8W	12-9/32
(1) 13W	21-9/32
(1) 14W	22-19/32
(2) 8W (T)	24-13/32
8W+13W (T)	33-13/32
(1) 21W	34-7/16
(2) 13W (T)	42-13/32
(1) 28W	46-7/32
(1) 35W	57-31/32

(T) Tandem

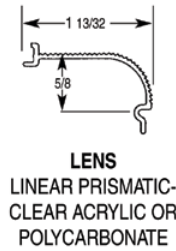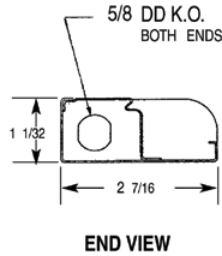

CONSTRUCTION

Die-formed, 20 gauge cold rolled steel. One piece folded construction. Diffuser snaps into housing for easy installation and re-lamping. Flattened knockouts are provided on ends for flexible conduit attachment.

Ends may be joined for continuous row-mounting.

MOUNTING

Fixtures are designed for surface mounting. Mounting holes are provided.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Extruded plastic translucent linear prismatic acrylic diffuser provides soft illumination.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.

315 - UC - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options	
Under Cabinet		14-1/	14w	T5-22	1/2 Long	120v	CO - Conv. Outlet
		21-1/	21w	T5-34	1/2 Long	277v	SW - Switch
		28-1/	28w	T5-46	1/2 Long		Cord - 8' Cord

Under Cabinet

(Product Number eg.: 400-PV-214-T-277-R)