




370 Wrap LED



APPLICATIONS

Offices, Class Rooms,
Retail Stores, Hospitals

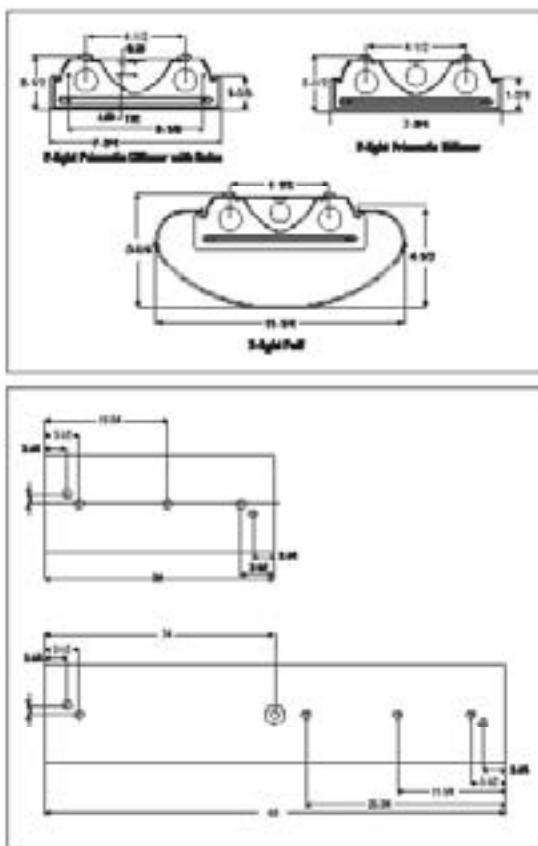

CONSTRUCTION

Die formed and embossed, 20 gauge pre-painted white cold rolled steel housing assembly. Embossed housing for strength and rigidity. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. (4' Units only.) Knockouts are provided on ends for through wiring. Diffuser hinges from either side in a lift and shift manner and is self centering. End caps may be butted together for continuous row mounting.

MOUNTING

Mounts over electrical junction box. Offset mounting pads keep the bulb level and slightly off of mounting surface.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Wraparound, extruded clear acrylic diffuser with prismatic bottom and ribbed linear sides, designed for high efficiency and visual comfort.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and NYC approved.

OPTIONS

Check product key or consult factory for available options.

LED

Keystone LED Boards and Drivers
0-10V Dimming
Rated for 50,000 Hours
4200 Lumens

370	-	WR	-		-	-	=	Product Number
Series	Description	# of Lamps	Wattage	Size	Voltage	Options		
	Wraparound		25w-LED*	4ft	UNV	EM - Emergency Ballast MS- Motion Sensor		
*5000 Lumens								
Wraparound				(Product Number eg.: 400-PV-214-T-277-R)				
* Only available in T5 ** .125 inches thick								