


525 Layin 2x4 LED



APPLICATIONS

Offices, Class Rooms,
Retail Stores, Hospitals

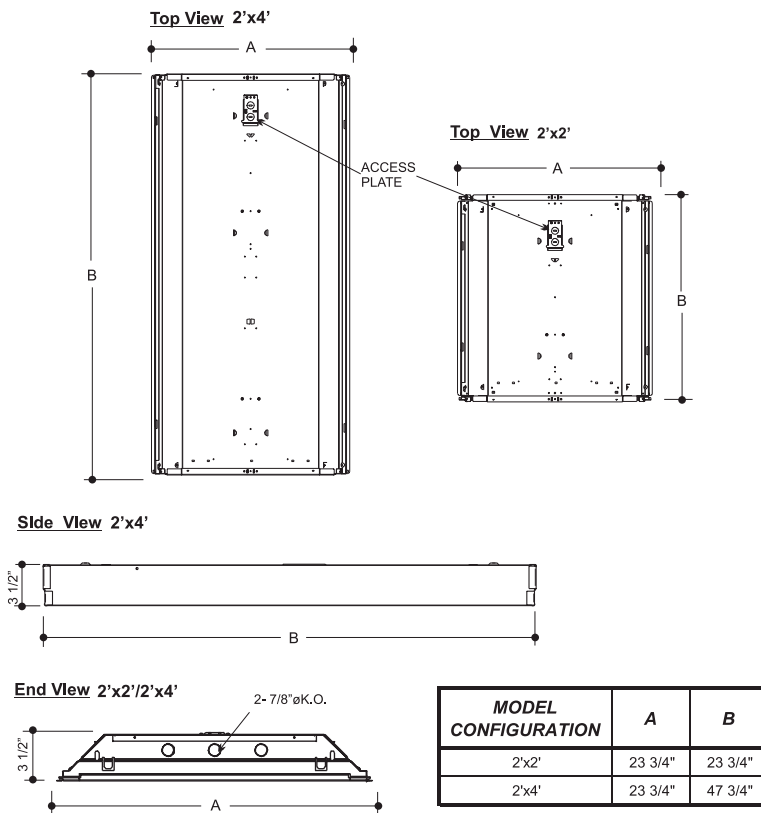

MODEL CONFIGURATION	A	B
2'x2'	23 3/4"	23 3/4"
2'x4'	23 3/4"	47 3/4"

525 - EL - [] - [] - [] - [] = Product Number

Series	Description	# of Lamps	Wattage	Size	Voltage	Options
	Economy		25W-LED	2x2	UNV	EM - Emergency Ballast
	Layin		40W-LED	2x4		35K - 3500 Kelvin 41K - 4000 Kelvin *
						.125 - Prismatic Plastic Lexan - Unbreakable Plastic

* Standard

Economy Layin (Product Number eg.: 400-PV-214-T-277-R)

CONSTRUCTION

Die-formed and embossed, 20 gauge pre-painted white cold rolled steel housing assembly. Embossed housing for strength and rigidity. Wiring access plate or knockouts are provided on back of housing, for flexible conduit attachment. (4' Units only.) Knockouts are provided on ends for through wiring. Ballast cover snaps into place eliminating the need for tools when accessing the Driver. Diffuser is held within a hinged frame door. The heavy gauge door frame hinges downward, on either side, and is held in the closed position by two positive cam latches. The metal-to-metal design of the door eliminates most light leaks.

MOUNTING

Lay-in type fixture for exposed grid type acoustical ceiling structure. Holes provided for chain mounting support to building structure.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

Standard diffuser is a clear, prismatic, pattern #12 extruded acrylic lens, designed for high efficiency and low glare illumination. Optional shielding is available.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

LED

25w 2 - Keystone Boards 2200 Lumens

40w 4 - Keystone Boards 4200 Lumens

Inventronics Drivers

0-10v Dimming