

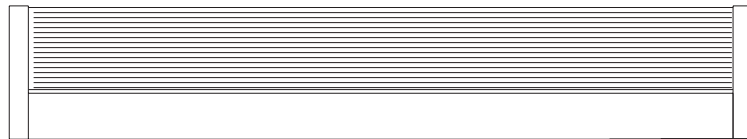
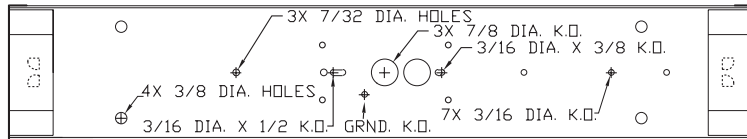


760 Vandal Proof LED



APPLICATIONS

Public Areas, High Abuse Areas, Locker Rooms, Stairwells, Corridors, Bathrooms



CONSTRUCTION

Die-formed and spot welded, 16-gauge cold-rolled steel housing. Plastic is held in place on both ends by end caps with provisions for three, tamper proof stainless steel screws.

MOUNTING

Wall or ceiling mounted. Mounts over electrical junction box. Mounting holes are provided.

FINISH

Phosphate coated, highly reflective, baked white enamel.

PLASTIC

Clear prismatic lens. One piece molded polycarbonate lens with nominal .125" wall thickness and continual groove designed to fit snugly over housing's edge. Tamper and impact resistant - standard.

.125 100% DR clear prismatic lens

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

OPTIONS

Check product key or consult factory for available options.

LED

13w 2 - Keystone Boards 2200 Lumens

25w 2 - Keystone Boards 4200 Lumens

Keystone Drivers

0-10v Dimming

760	-	VP	-		-		-		-		=	Product Number
Series	Discription	# of Lamps	Wattage	Size	Voltage	Options						
	Vandal Proof		13W-LED 25W-LED	24" 48"	UNV	EM - Emergency Ballast 35K - 3500 Kelvin * 41K - 4100 Kelvin						
* Standard												
Vandal Proof							(Product Number eg.: 400-PV-214-T-277-R)					