



850 Citadel VP LED



APPLICATIONS

Parking garages, Workshops, Canopies
Carwash, Cold storage, Food processing
Wet, damp or dusty environments.

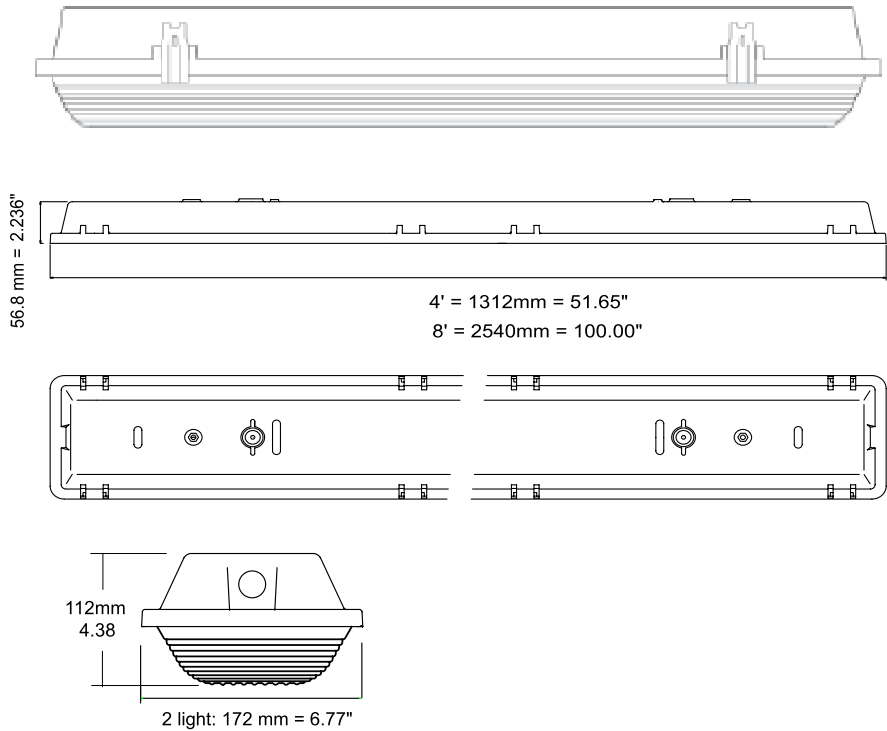

CONSTRUCTION

Fiberglass housing combined with a heavy duty high-impact acrylic plastic. For superior ingress resistance the acrylic diffusers offer a unique detailing that maximizes the seal with the gasket. Polycarbonate latches hold the diffuser in place. The hole is 7/8" diameter and is provided with a plastic plug on both ends for conduit attachment. Rather than having to add the expense and weight of a strip fixture, citadel uses a gear tray that will efficiently carry the electrical gear.

MOUNTING

Offset mounting pads which keeps fiberglass housing level and slightly off of mounting surface, are formed within the housing. Mounting brackets are available.

PLASTIC

Heavy duty high-impact acrylic diffuser with high efficiency clear ribbed design.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and NYC approved. Knockouts are provided on the back and ends for all types of wiring.

OPTIONS

Check product key or consult factory for available options.

CERTIFICATIONS

UL
NSF
NEMA 4X
IP65, IP66, IP67 Certified
ROHS
PSI 1500
SLP Guardian Seal

LED

Keystone LED Boards and Drivers
0-10v Dimming
50,000 Hours

Series	Description	# of Lamps	Wattage	Size	Voltage	Options
850	Ci					
	Citadel VP		13W-LED	24"	UNV	EM - Emergency Ballast
			25W-LED	48"		SS - Stainless Latches
			40W-LED	96"		35K - 3500 Kelvin*
						41K - Kelvin
			13W - 2200 Lumens			
			25W - 4200 Lumens			
			40W - 5400 Lumens			

Citadel VP (Product Number eg.: 400-PV-214-T-277-R) * Standard