





400 Puff Reverse

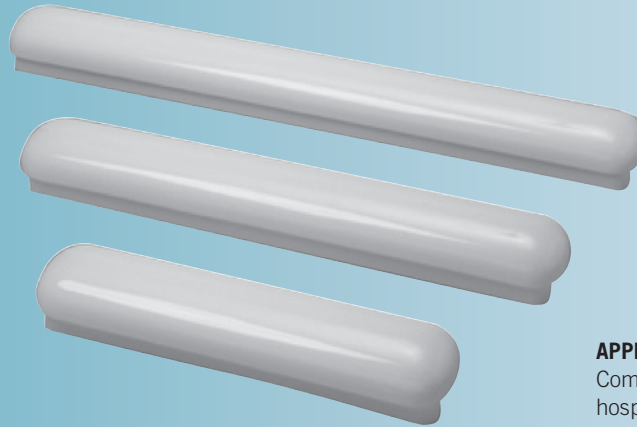

APPLICATIONS

Commercial, residential and hospitality installations.

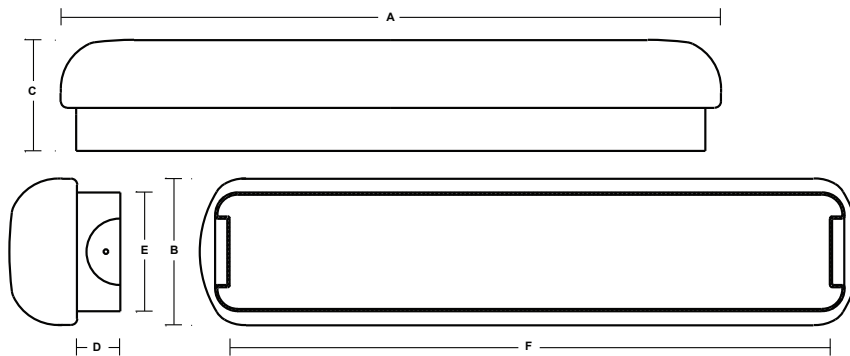

DIMENSIONS

A	B	C	D	E	F
26.75"	6.00"	4.125"	1.50"	4.625"	24.0625"
38.75"	6.00"	4.125"	1.50"	4.625"	36.0625"
50.75"	6.00"	4.125"	1.50"	4.625"	48.0625"

Dimensions should be confirmed via review or a production sample. Above Drawing and Dimensions Chart is for referer

CONSTRUCTION

With sockets attached, ends can be folded down inside of body to protect sockets and provide for compact shipping and storage. When rotated 90° into upright position, the ends snap in and lock.

The economy pan, a basic all purpose fluorescent light fixture, has a wide range of applications.

Die-formed of 20 gauge cold rolled steel.

Ends pop into position and accept slide-on or screw-on sockets.

MOUNTING

Fixtures are designed for surface mounting.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

This Diffuser utilizes the unobtrusive puff design in a compact linear shape. The diffusers are suitable for either ceiling or wall mounts in commercial, residential, or hospitality applications.

A hole and plug kit is available in which a solid knockout plug can be inserted into the knockout on the end plates of the fixture, and the lens is attached to the fixture via screws provided in the knockout kit.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.

400	-	PR	-		-		-		-		=	Product Number
Series	Description	# of Lamps	Wattage	Size	Voltage	Options						
400	Puff Reverse	1	20-20wT12	T-8' Tandem	120v	EM - Emergency Ballast						
		2	30-30wT12		277v	HO - High Output**						
		3*	40-40wT12		UNV	Dim - Dimmable Ballast						
			17-17wT8									
			25-25wT8									
			32-32wT8									
			14-14wT5									
			21-21wT5									
			28-28wT5									
			24-24wT5-HO									
			39-39wT5-HO									
			54-54wT5-HO									

Puff Reverse

* Only available in T5 & T8
** Only available in T5

(Product Number eg.: 400-PV-214-T-277-R)