





400 Puff Reverse

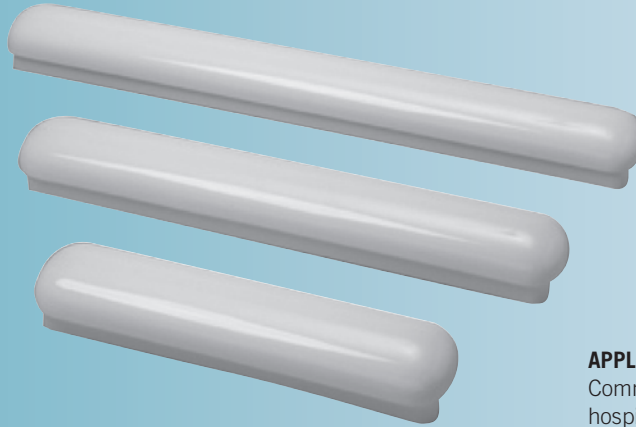

APPLICATIONS

Commercial, residential and hospitality installations.

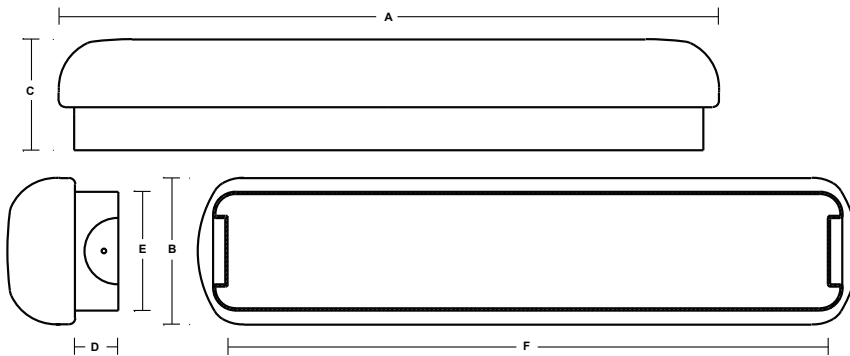

DIMENSIONS

A	B	C	D	E	F
26.75"	6.00"	4.125"	1.50"	4.625"	24.0625"
38.75"	6.00"	4.125"	1.50"	4.625"	36.0625"
50.75"	6.00"	4.125"	1.50"	4.625"	48.0625"

Dimensions should be confirmed via review or a production sample. Above Drawing and Dimensions Chart is for referen

CONSTRUCTION

With sockets attached, ends can be folded down inside of body to protect sockets and provide for compact shipping and storage. When rotated 90° into upright position, the ends snap in and lock.

The economy pan, a basic all purpose fluorescent light fixture, has a wide range of applications.

Die-formed of 20 gauge cold rolled steel.

Ends pop into position and accept slide-on or screw-on sockets.

MOUNTING

Fixtures are designed for surface mounting.

FINISH

Phosphate coated, highly reflective, baked, white enamel.

PLASTIC

This Diffuser utilizes the unobtrusive puff design in a compact linear shape. The diffusers are suitable for either ceiling or wall mounts in commercial, residential, or hospitality applications.

A hole and plug kit is available in which a solid knockout plug can be inserted into the knockout on the end plates of the fixture, and the lens is attached to the fixture via screws provided in the knockout kit.

ELECTRICAL

Fixtures and components are all assembled by I.B.E.W. union workers, and are UL and NYC approved.

Knockouts are provided on the back and ends for all types of wiring.

Slide-on or snap-in sockets are provided.

Ballast and sockets are replaceable without removing the fixture from the mounting surface.

Standard ballasts are electronic 120v.

OPTIONS

Check product key or consult factory for available options.

400 - PR - [] - [] - [] - [] = Product Number

Series	Discription	# of Lamps	Wattage	Size	Voltage	Options
400	Puff Reverse	1	20-20w T12	T-8'	120v	EM - Emergency Ballast
		2	30-30w T12	Tandem	277v	HO - High Output**
		3*	40-40w T12		UNV	Dim - Dimmable Ballast
			17-17w T8			
			25-25w T8			
			32-32w T8			
			14-14w T5			
			21-21w T5			
			28-28w T5			
			24-24w T5-H0			
			39-39w T5-H0			
			54-54w T5-H0			

Puff Reverse (Product Number eg.: 400-PV-214-T-277-R)
* Only available in T5 and T8 ** Only available n T5